


# NON RETURN VALVE

Spring Check Valve Watermarked

## Product Specifications

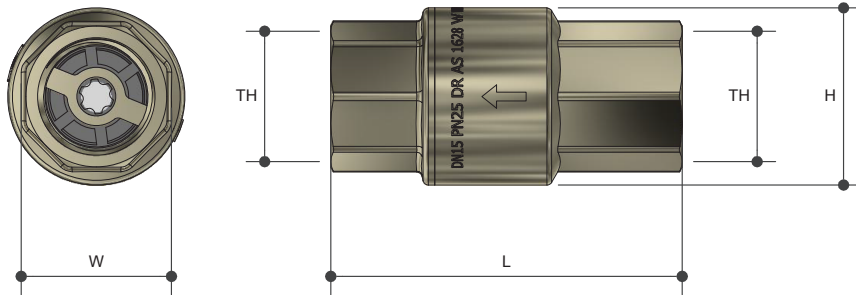

## Specifications

Working temperature 1°C to 130°C


Maximum pressure rating 2000kPa

Maximum back pressure 1500kPa

## Sizing Chart [MM]

	L	H	W	TH
WSP32	83	59	47	Rp 1 1/4"
WSP40	84	69	54	Rp 1 1/2"
WSP50	96	86	67	Rp 2"

## Pressure and Loss

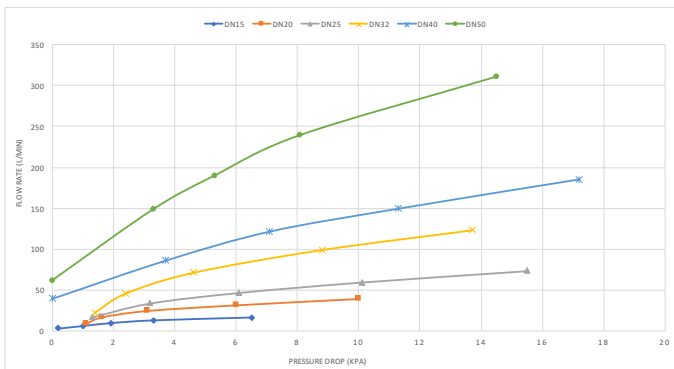

For more information on Logi Valve, contact:

Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430

F. 1300 780 441

E. [info@austworld.com.au](mailto:info@austworld.com.au)

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.



## Features

Watermark approved

DR Brass

Suitable for vertical and horizontal installations

High flow design with minimal head loss

Tested and certified to AS 1628

## Benefits

A versatile spring check valve that can be used on potable water applications and solar water.

## Material Chart

Part	Material
Washer	EPDM
Stem	DR Brass
Body	DR Brass
Cap	DR Brass
Spring	Stainless Steel
Seals	FKM

