


# NON RETURN VALVE

Spring Check Valve Watermarked

## Product Specifications

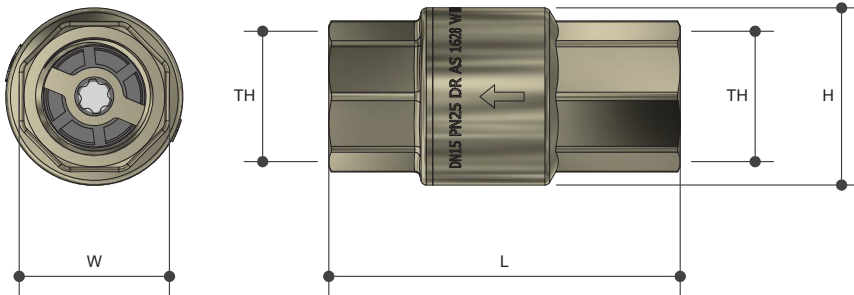

### Specifications

Working temperature 1°C to 130°C


Maximum pressure rating 2000kPa

Maximum back pressure 1500kPa

### Sizing Chart [MM]

	L	H	W	TH
WSP15	64	27	32	Rp 1/2"
WSP20	62	39	31	Rp 3/4"
WSP25	73	48	39	Rp 1"

### Pressure and Loss

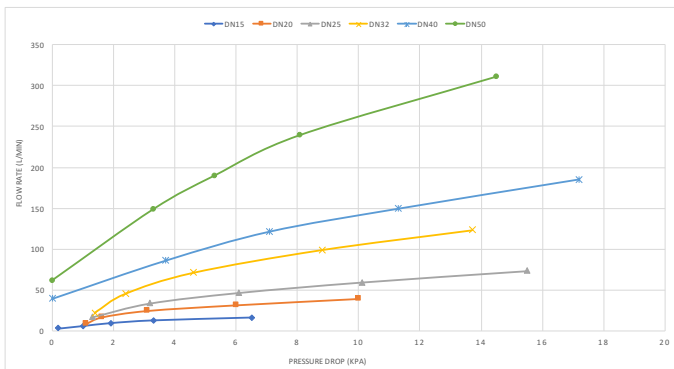

For more information on Logi Valve, contact:  
 Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
 P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

### Features

Watermark approved

DR Brass

Suitable for vertical and horizontal installations

High flow design with minimal head loss

Tested and certified to AS 1628

### Benefits

A versatile spring check valve that can be used on potable water applications and solar water.

### Material Chart

Part	Material
Washer	EPDM
Stem	ULTEM
Body	DR Brass
Cap	DR Brass
Spring	Stainless Steel
Seals	FKM



AUSTWORLD