


DUAL CHECK VALVE

Hand Shower Type

Product Specifications

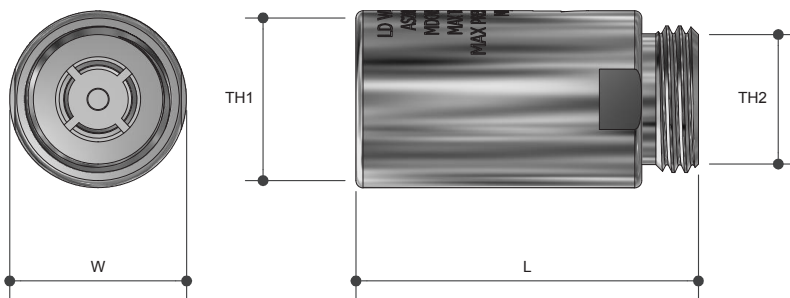

Specifications

Maximum working temperature 60°C

Maximum working pressure 1200KPa

Sizing Chart (MM)

	L	W	TH1	TH2
MDOV15CH	48	25	G 1/2"	G 1/2"

Features

Watermark approved

Suitable for vertical and horizontal installations

Seamless design for easy integration

Protects against back flow and back siphonage

Suitable for shower hoses

Tested and certified to AS/NZS 2845.1

Material Chart

Part	Material
Check Valve	POM
Washer	EPDM
Body	DZR Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

