


PRESSURE CONTROL VALVE

Pressure Reduction Right Angle Flared

Product Specifications

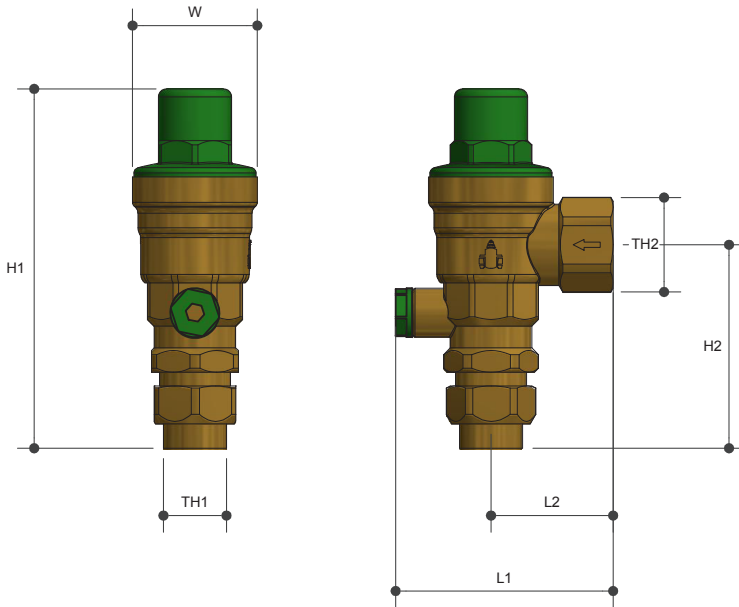

Specifications

Maximum temperature 60°C

Outlet pressure range 150 to 600kPa

Factory set at 500kPa

Maximum inlet pressure 1600kPa

Flow rate 100L/min at 700kPa

Sizing Chart (MM)

	L	H1	H2	W1	W2	TH1	TH2
RAPR20C	133	83	58	35	45	DN20	Rp3/4"

Features

Watermark approved

DR Brass

Excellent flow rates

Protects appliances and heating systems

Suitable for vertical or horizontal installations

Internal strainer

Adjustable 150-600kPa

Factory set at 500kPa

Outlet for pressure gauge

UV resistant cap

Tested and certified to AS 1357.1

Material Chart

Part	Material
Cover	PA
Spring	Stainless Steel
Body	DR Brass
Cartridge	POM
Strainer	Stainless Steel

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

